

28608 OCTAL PROGRAMMABLE FILTER AMPLIFIER

For the 28000 Signal Conditioning System



SYSTEM 28000 FEATURES

- Graphical User Interface (GUI) and Ethernet network interface for system control
- Intelligent gain and system scaling algorithms
- Test input and output monitor busses
- Go/No-Go test with diagnostics to be used before tests
- Rigorous factory acceptance test for maintenance
- Built-in temperature and power supply monitoring with alarms

28000 SIGNAL CONDITIONING SYSTEM

The Precision 28000 signal conditioning system provides all the flexibility you need to manage your test measurements.

The Precision 28000 makes it easy to manage a test with hundreds of channels and a mix of transducers. Choose charge, IEPE w/TEDS, voltage (filter amplifier), strain, thermocouple, RTD, potentiometer, current, frequency, or other transducers.

The built-in test hardware and software (optional) provide quick Go/No-Go tests which can be run before each test, and rigorous factory acceptance tests to assure you that the 28000 meets your most stringent requirements for critical applications. It won't be long before these tests earn a permanent place in your maintenance routine. And since they are traceable to NIST, they eliminate the need for off-site calibration.

In every phase of your tests—record keeping, installation, design, set-up, operation, maintenance and upgrading—the Precision 28000 offers ways to help you save time and money over the life of the system.

APPLICATIONS

- Anti-Aliasing Filters with Programmable Amplifiers
- Automatic Test Equipment
- Data Acquisition
- Signal Conditioning
- Production Test Equipment
- Industrial Process Control
- Reconstruction Filters
- Programmable Band-Pass Filters

SALIENT FEATURES

Number of Channels:	8 channels per card; 128 channels per chassis
Inputs:	Balanced differential with programmable AC/DC coupling
Zero Suppress:	Programmable DC voltage is inserted at channel input.
Pre-Filter Gain:	x1 to x128 in x2 steps with input overload detection
Post-Filter Gain:	x0.25 to x16 with 0.05% resolution
Filters:	Choice of 4- or 8-pole low-pass filters or 8-pole band-pass filters.
Cutoff Frequency:	Pulse Mode Programmable from 1 Hz to 102.3 kHz; Flat Mode programmable from 2 Hz to 204.6 kHz; and wideband (500 kHz)
Outputs:	DC coupled, single-ended
Test Support:	Test input and monitor output busses

28608 DESCRIPTION

The 28608 octal programmable filter/amplifier card allows for up to 128 channels of programmable precision filtering in one 28016-M3 chassis. Low-pass, high-pass and band-pass configurations are available. The 28608 is ideal for conditioning low-level voltage inputs in front of high-resolution digital data acquisition systems.

A choice of 4 or 8-pole low-pass filters, 4-pole high pass and 8-pole band-pass filters are available. Cutoff settings from 1 Hz to 204.6 kHz are supported. The low-pass filters may operate in either a "flat" mode for maximally flat pass-band amplitude response with sharp roll-off or in a "pulse" mode for low phase distortion and optimized transient response.

28608 DESCRIPTION (Continued)

The “flat” mode provides pass-band characteristics nearly identical to a Butterworth filter while providing a much sharper roll-off. This mode is a good choice for applications such as spectral analysis. The “pulse” mode has time domain response similar to the Bessel filter yet provides superior amplitude response characteristics. The “pulse” mode is ideal for time domain applications including transient (shock) measurements and time domain waveform analysis.

Programmable pre- and post-filter amplifiers provide an overall gain of 2048. Gain is distributed both before and after the filter to provide protection from large out-of-band energy or transients that could cause clipping before the filter, distorting the data. The post-filter gain has resolution of better than 0.05% to enable system scaling of the outputs to match the full-scale input of the external recording device. Overload detectors alert the user to over-voltage conditions. Precise, automated digital calibration of gain and DC offset are provided.

Other features of the 28608 include a test input for injection of calibration signals into the channel input and a monitor output that allows for convenient monitoring of any channel output via a single BNC on the 28000 chassis.

28608 AMPLIFIER SPECIFICATIONS

- Pre-Filter Gain: x1 to x128 in x2 steps with overload detection (10.2 Vpk threshold)
- Post-Filter Gain: x0.25 to x16 with 0.05% resolution
- DC Accuracy: 0.2% after auto-adjust at any gain setting
- Temp. Coef: $\pm 0.008\%$ /°C
- DC Linearity: $\pm 0.01\%$ re: Fullscale, relative to best straight line
- Freq. Response: DC to 200 kHz; 0 dB \pm 1%
-3 dB typical at 500 kHz

28608 INPUT CHARACTERISTICS

- Type: Balanced Differential w/ programmable AC/DC input coupling
- Input Impedance: 10 M Ω //100pF per side
- Max Level: (AC + DC + Common Mode)
 ± 10 Vpk for $f \leq 200$ kHz
 ± 10 Vpk x (200 kHz/f) for $f > 200$ kHz
- Input Protection: 35 V
- Offset Drift: 1 μ V/°C, typical
- Noise: 7 nV/ $\sqrt{\text{Hz}}$ at 1 kHz and pre-filter gain > 64, typical
- AC Coupling Freq: 0.25 Hz (-3.01 dB)
- CMRR (DC Cpld.): 86 dB, DC to 440 Hz and input gain > x8
- CMRR (AC Cpld.): 80 dB, 10 Hz to 440 Hz


Input Short: All amplifier inputs may be programmed to ground to measure amplifier noise and DC offset.

Test Input: A switch at the channel input allows for injection of external test signal via an external 28000 chassis front panel BNC connector.

Zero Suppress: Precision programmable DC offset is injected at the channel input stage to suppress the DC operating voltage. Manual or automatic suppression modes are supported.

Range: -160 mV to +160 mV in 78 μ V steps
-1.28 V to +1.28 V in 625 μ V steps
-10.24 V to +10.24 V in 5 mV steps

Accuracy: $\pm 0.25\%$ of setting ± 5 mV

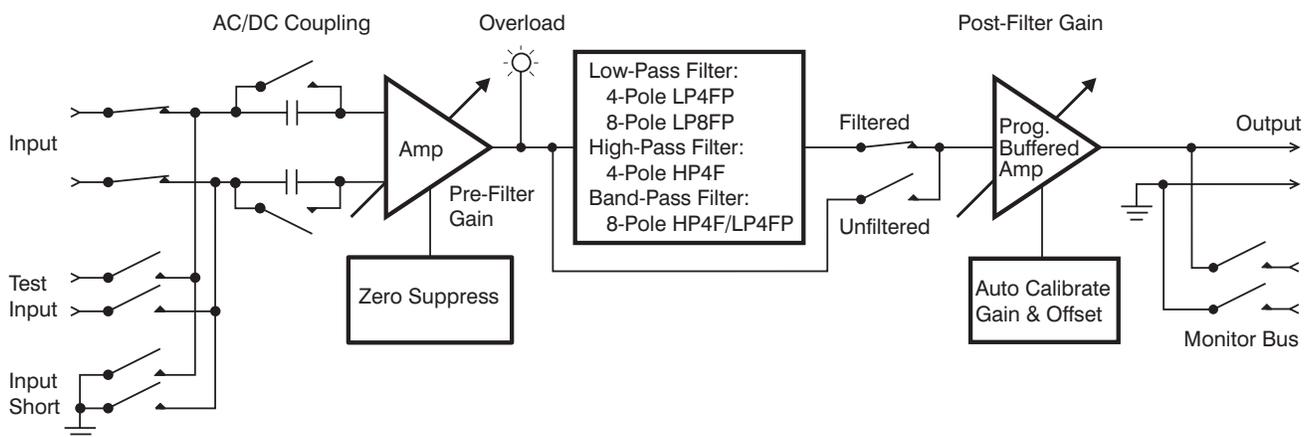

28608 Channel Block Diagram

FILTER CHARACTERISTICS

Option LP4FP: 4-pole, 4-zero low-pass filter. Programmable for maximally flat pass-band (LP4F) or linear phase with optimized pulse response (LP4P).

Option LP8FP: 8-pole, 8-zero low pass filter. Programmable for maximally flat pass-band (LP8F) or linear phase with optimized pulse response (LP8P).

Option HP4F: 4-pole, 4-zero high-pass filter. Maximally flat pass-band.

Option HP4F/LP4FP: 8-pole, 8-zero band-pass filter. Flat HP4F 4-pole, 4-zero high-pass filter cascaded with a 4-pole, 4-zero low-pass filter. Low pass filter programmable for maximally flat pass-band (LP4F) or linear phase with optimized pulse response (LP4P).

FILTER CHARACTERISTICS (Continued)

Cutoff Frequencies:

Flat Mode: 2 Hz to 2.046 kHz in 2 Hz steps
2.2 kHz to 204.6 kHz in 200 Hz steps
Pulse Mode: 1 Hz to 1.023 kHz in 1 Hz steps
1.1 kHz to 102.3 kHz in 100 Hz steps

LP4F, LP4P, LP8F, LP8P:

Amplitude Accuracy: ± 0.1 dB max, DC to 0.8 Fc
 ± 0.2 dB max, 0.8 Fc to Fc
Amplitude Match: ± 0.1 dB max, DC to 0.8 Fc
 ± 0.2 dB max, 0.8 Fc to Fc
Phase Match: $\pm 1^\circ$ max, DC to 0.8 Fc
 $\pm 2^\circ$ max, 0.8 Fc to Fc

HP4F:

Amplitude Accuracy: ± 0.1 dB max, 1.2 Fc to 204.6 kHz
 ± 0.2 dB max, Fc to 1.2 Fc
Amplitude Match: ± 0.1 dB max, 1.2 Fc to 204.6 kHz
 ± 0.2 dB max, Fc to 1.2 Fc
Phase Match: $\pm 1^\circ$ max, 1.2 Fc to 204.6 kHz
 $\pm 2^\circ$ max, Fc to 1.2 Fc

Bypass: Bypasses filter but not amplifier stages. Each filter may be independently bypassed for the HP4F/LP4FP band-pass filter.

Bypass BW: 500 kHz, typical

Specification	LP4F Maximally Flat Low-Pass Filter	LP4P Constant Time Delay Low-Pass Filter	LP8F Maximally Flat Low-Pass Filter	LP8P Constant Time Delay Low-Pass Filter
Cutoff Frequency Amplitude	-3.01 dB	-3.01 dB	-3.01 dB	-3.01 dB
DC Gain	0.00 dB	0.00 dB	0.00 dB	0.00 dB
Pass-Band Ripple	0.00 dB	0.00 dB	0.00 dB	0.00 dB
Stop-Band Frequency	5.9465 Fc	11.863 Fc	1.7479 Fc	3.4688 Fc
Cutoff Frequency Phase	-180.0 deg	-101.5 deg	-360 deg	-161.9 deg
Phase Distortion (DC to Fc)	< 31.8 deg	< 3.7 deg	< 102 deg	< 0.05 deg
Zero Frequency Group Delay	0.4117/Fc	0.2920/Fc	0.7197/Fc	0.4496/Fc
Percent Overshoot	11.1%	0.5%	18.9%	1.1%
1% Settling Time	1.65/Fc	0.66/Fc	4.03/Fc	1.25/Fc
0.1% Settling Time	2.72/Fc	0.77/Fc	7.02/Fc	2.25/Fc
-0.1 dB Frequency	0.635 Fc	0.182 Fc	0.8538 Fc	0.180 Fc
-1 dB Frequency	0.8487 Fc	0.5741 Fc	0.9437 Fc	0.5685 Fc
-2 dB Frequency	0.9370 Fc	0.8129 Fc	0.9772 Fc	0.8087 Fc
-3.01 dB Frequency	1.0000 Fc	1.0000 Fc	1.0000 Fc	1.0000 Fc
-20 dB Frequency	1.7412 Fc	3.0248 Fc	1.2149 Fc	2.2342 Fc
-40 dB Frequency	2.9555 Fc	5.6932 Fc	1.4443 Fc	2.7556 Fc
-60 dB Frequency	4.5986 Fc	9.0980 Fc	1.6391 Fc	3.2016 Fc
-80 dB Frequency	5.9465 Fc	11.8629 Fc	1.7479 Fc	3.4688 Fc

28608 OUTPUT CHARACTERISTICS

Type: DC coupled, single ended output
Impedance: $10\ \Omega // 100\ \text{pF}$
Max Output: $\pm 10\ \text{Vpk}$, $\pm 10\ \text{mA pk}$
Offset: $< 5\ \text{mV}$ after auto-adjust at any gain setting
Offset Drift: $1\ \mu\text{V}/^\circ\text{C}$, RTI + $150\ \mu\text{V}/^\circ\text{C}$ RTO
Noise: $2.8\ \mu\text{V rms RTI}$ + $60\ \mu\text{V rms RTO}$
 $3\ \text{Hz to } 100\ \text{kHz}$
Crosstalk: $-90\ \text{dB}$, DC to $100\ \text{kHz}$

Output Monitor: A switch at the output of each channel allows for multiplexed connection to the 28000 chassis output monitor bus BNC connector for viewing the channel output with an external device.

28608 GENERAL CHARACTERISTICS

28608 Card Size: $6.63 \times 17.5 \times 0.75$ inches
Card Weight: 1.4 lb. net
Temperature: $0^\circ\ \text{C}$ to $40^\circ\ \text{C}$ (operating)
 $-20^\circ\ \text{C}$ to $70^\circ\ \text{C}$ (storage)
Connectors: The input and output connectors are integral to the 28608 card. Cutouts on the 28000 frames allow for the input connector to pass through the backplane to directly mate with the input/output cables. One 26-pin high density D connector is utilized for the 8 inputs and one 26-socket high density D connector is used for the 8 outputs. Three wires per input or output are provided in order to accommodate twisted/shielded cables. Connectors have high quality machined gold plated pins/sockets.

ORDERING INFORMATION

28608-**<LP4FP|LP8FP|HP4F|HP4F/LP4FP>**

Filter Specification
4-pole low-pass (LP4FP)
8-pole low-pass (LP8FP)
4-pole high pass (HP4F)
8-pole band-pass (HP4F/LP4FP)

ACCESSORIES

Mating Connectors

Precision Filters mating connectors accommodate up to 22 AWG wire and are supplied with high quality metal backshells and gold plated screw machined contacts for high reliability connections and long service life.

CONN-IN-26D-MTL: High-Density 26-pin D-shell mating input connector with machined crimp pins and metal backshell with strain relief.

CONN-IN-26D-SC-MTL: High-Density 26-pin D-shell mating input connector with machined solder cup pins and metal backshell with strain relief.

CONN-OUT-26D-MTL: High-Density 26-pin D-shell mating output connector with machined crimp pins and metal backshell with strain relief.

CONN-OUT-26D-SC-MTL: High-Density 26-pin D-shell mating output connector with machined solder cup pins and metal backshell with strain relief.

Output Adapter

Measurement system requirements sometimes need multiple outputs per signal conditioning channel. These outputs may be routed to control systems, tape backup systems, auxiliary data acquisition systems, scope bays and other destinations.

Precision Filters manufactures output adapter modules to provide one additional fully buffered output per channel on eight BNC connectors. Eight-channel 28000 System signal conditioning cards are fitted with front panel connectors that accept the output adapter modules. Adapters plug on to the front of the signal conditioner card and are secured to the card by two screws.

BUFF-8BNC-Y?: Octal output adapter module with 8 BNC output connectors. Y? indicates the output attenuation of the buffer.

